

Munters Euroemme Saturn ONE

Air extraction fans

The Saturn ONE series is a feature rich, high-tech, and completely modular series of fans, able to combine exceptional airflow with fully energy efficiency. This means superior growth of livestock and yield, improved animal welfare and more sustainable business.

Benefits

- Fewer moving parts reduce maintenance time and costs
- Smooth inner housing edges increase airflow efficiency
- Reduced noise emission improves the indoor environment for animals
- Energy efficient ventilation system, saving up to 50% of electricity with the E-line version
- The patented detachable Anti-Gravity Shutter (AGS) reduces light, air leakage, dust deposit and noise

Saturn ONE is designed for any poultry or greenhouse application in any climate zone.


The propeller blades are designed for optimal performance, providing exceptional airflow even in high-pressure environments with an excellent airflow ratio and efficiency.

The patented AGS seals tightly eliminating the thread of light, air draft and dust deposit.

The E-line version ensures performance above the market standard and reduces power consumption by up to 50% compared to the same fan with AC motor, all while enabling speed regulation. Its AGS opening is controlled by an on-off gear motor, ensuring reliable operation regardless of fan speed.

All Saturn ONE models are fully compliant with the latest EU Ecodesign requirements, ensuring certified performance and full CE marking for your peace of mind.

As the market leader in ventilation solutions for more than 60 years, GrainProteinTech Climate Control & Air Treatment guarantees quality and is ISO 9001 certified.

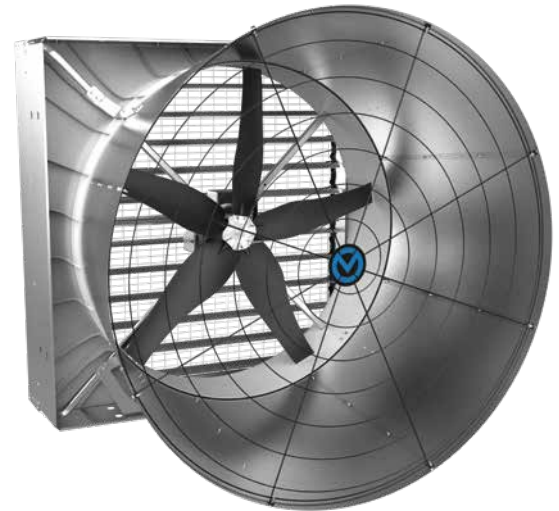

Saturn ONE Direct drive 5 blades



Saturn ONE E-line 3 blades – Patented Anti-Gravity Shutter (AGS)



Proudly manufactured with 100% renewable energy in our plants in Italy

Models


	Belt 1.5	Belt 2.0	Direct 2.0	E-line
Motor	AC, Belt	AC, Belt	AC, Direct	EC, Direct
Propeller	3 blades, M-Protect	6 blades, M-Protect	3/5 blades, composite	3/5 blades, composite
Nominal power	1.5 hp	2.0 hp	2.0 hp	3.0 hp
Application	Broiler, greenhouse (light filters cannot be used)	Layer houses with obstacles Broiler mega houses Light control (light filters) houses	Layer houses with obstacles Broiler mega houses Light control (light filters) houses No maintenance	Any poultry, greenhouse in any climate zone No maintenance
Max static pressure	Up to 75 Pa	Up to 100 Pa	Up to 100 Pa ¹	Up to 140 Pa

¹Motorized AGS required for higher static pressure.

Munters Euroemme Saturn ONE

AC motor

Dimensions

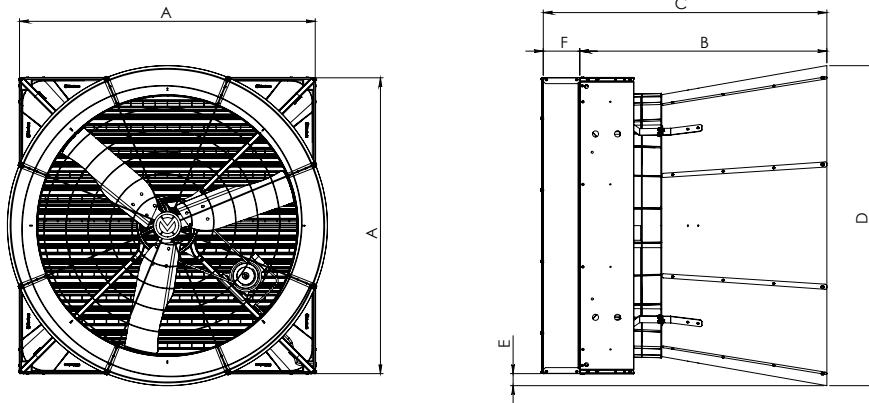


A	B	C	D	E	F
1615 mm	1345 mm	1518 mm	1745 mm	80 mm	173 mm

Technical specifications


		Belt 1.5	Belt 2.0	Direct 2.0	
Nominal power	hp [kW]	1.5 [1.1]	2.0 [1.5]	2.0 [1.5]	
Propeller diameter	mm [inch]	1400 [55]		1400 [55]	
Number of blades/material		3/M-Protect	6/M-Protect	3/Composite	5/Composite
Motor/drive type		AC/Belt		AC/Direct	
Weight of fully equipped fan	kg	110	130	130	131
Max power consumption/max current ¹	W/A	1900/3.5	2350/4.9	2115/4.9	2460/4.8
Protective class of electric motor		IP55		IP55	
Noise level ²	Db(a)	75.3	76.9	77.7	78.9

¹50 Hz 400 V specification, 60 Hz available upon request (not available with Direct drive 5 blades), ²Noise measured according to ISO 3744

Airflow

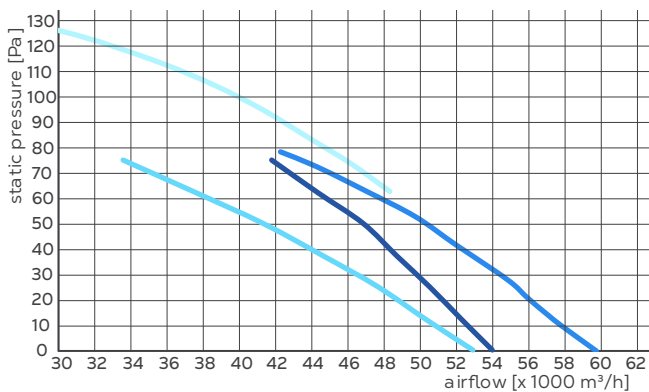

Efficiency

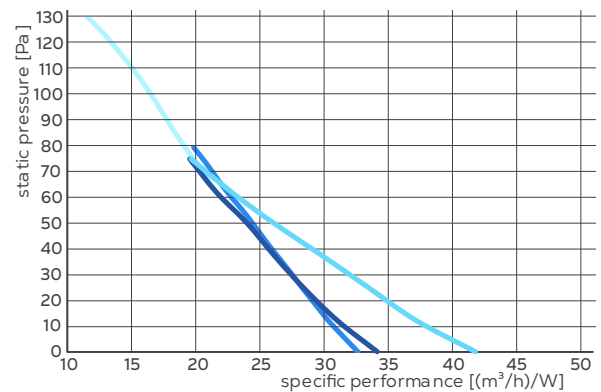

Belt 1.5		Belt 2.0		Direct 2.0*	
Motor	BESS Lab	Motor	BESS Lab	Motor	Motor
— IE3 1.5 hp	#21109	— IE3 2.0 hp	#21113	— IE3 2.0 hp, 3 blades	— IE3 2.0 hp, 5 blades

*Airflow and efficiency tested in the test chamber in accordance with ANSI/AMCA 210/15 Standard, certified by BESS Lab.

Load capacity


	Belt 1.5		Belt 2.0		Direct 2.0	
	Unassembled	Assembled	Unassembled	Assembled	Unassembled	Assembled
40' HC container	132 (108 ¹)	25	120 (96 ¹)	25	72 (60 ¹)	21
13.6 m truck	-	31	-	31	-	26

¹With square safety mesh

Munters Euroemme Saturn ONE

E-line

Dimensions


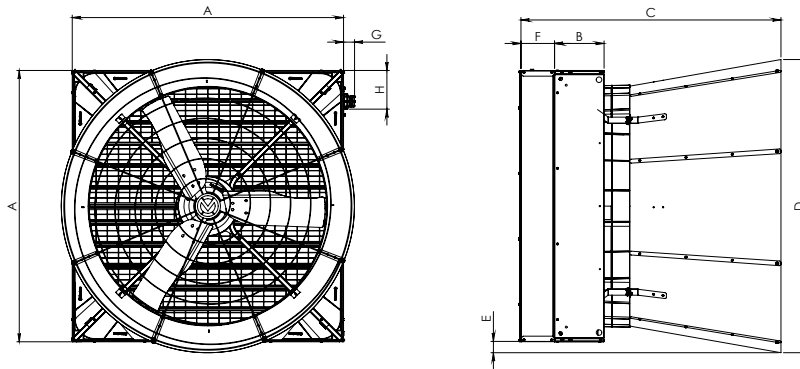


A	B	C	D	E	F	G	H
1615 mm	295 mm	1518 mm	1745 mm	80 mm	173 mm	65 mm	230 mm

Technical specifications

		E-line	
Nominal power	hp [kW]	3.0 [2.2]	
Propeller diameter	mm [inch]	1400 [55]	
Nominal propeller speed	rpm	730	
Motor/drive type		EC/Direct	
Number of blades/material		3/Composite	5/Composite
Weight of fully equipped fan	kg [lbs]	120	121
Max power consumption/max current ¹	W/A	2400/4.5	2700/4.5
Protective class of electric motor		IP66	
Noise level ²	Db(a)	79.2	80.9

¹400 V specification, ²Noise measured according to ISO 3744

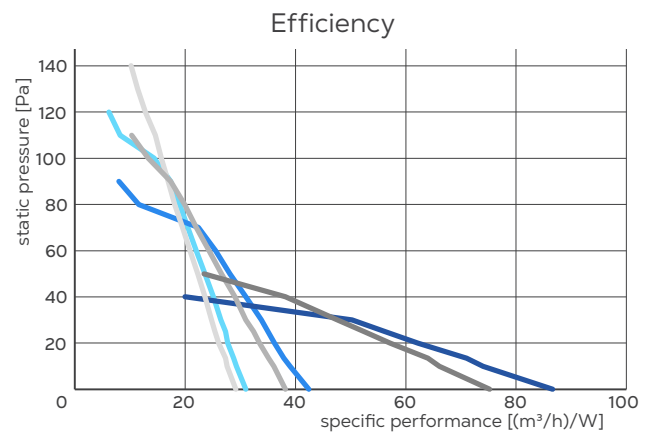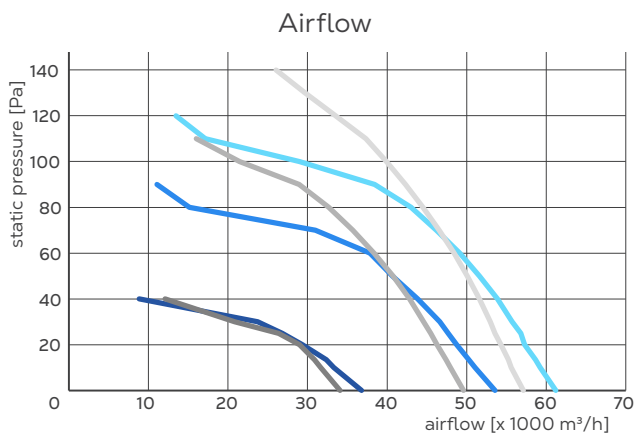

3 blades: — 730 rpm, — 630 rpm, — 430 rpm; 5 blades: — 730 rpm, — 630 rpm, — 430 rpm.

Airflow and efficiency tested in the test chamber in accordance with ANSI/AMCA 210/15 Standard, certified by BESS Lab.

Load capacity

	E-line	
	Unassembled	Assembled
40' HC container	72	21
13.6 m truck	-	26