

Munters Euroemme GPmp

Indirect-fired heaters

GPmp air heaters are engineered to deliver efficient and economical heating across a wide range of applications, from livestock facilities (broilers, layers, swine) to greenhouse environments.

Benefits

- Thermal efficiency exceeding 90%
- Corrosion resistant - housing components made in M-Protect and combustion chamber in stainless steel
- Oil or gas-fired burners installed, calibrated and set up on site
- Direct driven motor on axial fan
- Ergonomic design for easy maintenance and full accessibility
- Equipped with 5-pole plug socket for farm controller or room thermostat connection



GPmp 130

GPmp combustion heaters are indirect-fired units that reach a thermal efficiency of 90% or higher, leading to more heating output for the same fuel consumption.

To ensure a longer service life, all GPmp models (100, 130, and 160) feature corrosion-resistant materials: M-Protect housing, legs and support frame; stainless steel combustion chamber and safety thermostats; IP55 electrical enclosures.

GPmp air heaters have a compact modular design, which results in versatility and efficient logistics. They are available as hanging units, with oil or gas burners. Thanks to the leg design and support frame, they are easy to handle, transport, install, and maintain, saving time and costs.

Operating noise levels are noticeably reduced, assuring a comfortable environment for both animals and workers. Additionally, GPmp units can be used during hot periods by operating the fan only, allowing the heater to function as an air circulator.

As the market leader in ventilation solutions for more than 60 years, GrainProteinTech Climate Control & Air Treatment guarantees quality and is ISO 9001 certified.




Proudly manufactured with 100% renewable energy in our plants in Italy

Munters Euroemme GPmp


Indirect-fired heaters

Dimensions – straight outlet

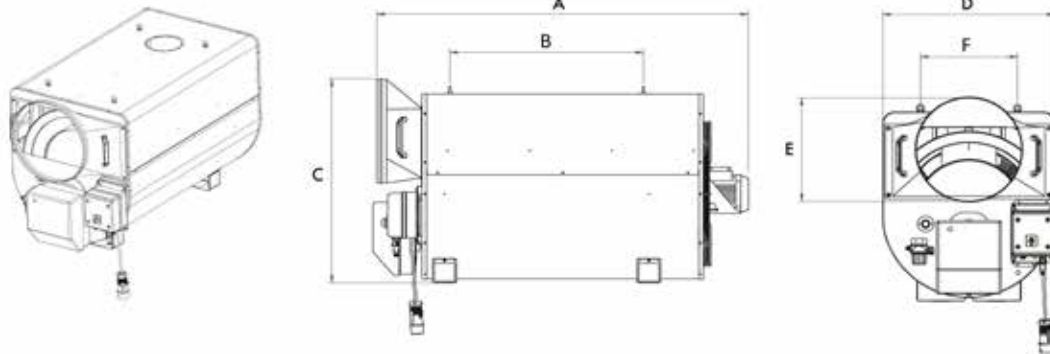

	A	B	C	D	E	F
GPmp100	1470 mm	650 mm	966 mm	800 mm	500 mm	450 mm
GPmp130	1723 mm	897 mm	966 mm	800 mm	500 mm	450 mm
GPmp160	1768 mm	895 mm	1065 mm	892 mm	600 mm	500 mm

Dimensions – T-outlet

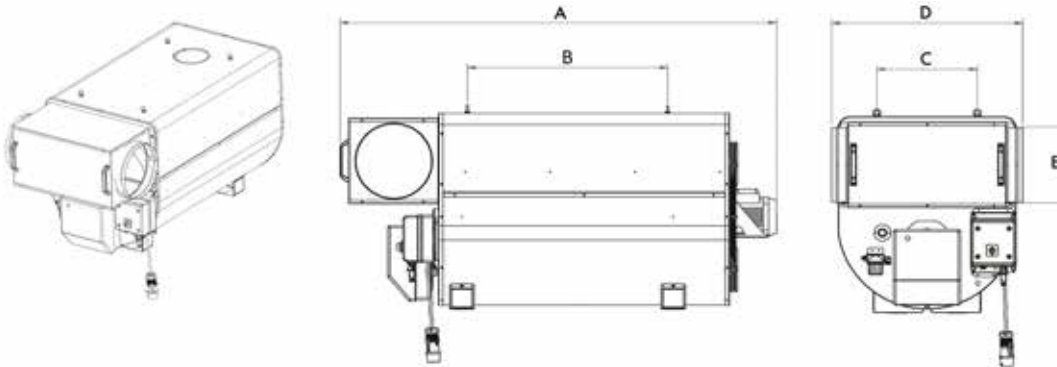

	A	B	C	D	E
GPmp100	1700 mm	650 mm	450 mm	855 mm	347 mm
GPmp130	1954 mm	897 mm	450 mm	855 mm	347 mm
GPmp160	2030 mm	895 mm	500 mm	905 mm	397 mm

Technical specifications

		GPmp100	GPmp130	GPmp160
Maximum power output	kW	102.4	129	157
Heating output	kW	93	116.5	141
Airflow ¹	m ³ /h [cfm]	6600 [3885]	7400 [4355]	9800 [5768]
Nominal power	W	1400	2200	2600
Rated voltage (3-phase)	V		230/400	
Rated frequency	Hz		50/60	
Rated current	A	3	5	5.9
Oil consumption	l/h	9.5	12	14.6
Gas consumption	kg/h	7.2 - 9.5	9.3 - 12.4	11.4 - 15.3
Gas pressure	mbar		30 - 50	
Weight (with straight outlet)	kg	155	188	195
Motor insulation grade/protective class			F/IP55	

¹Airflow tested in the test chamber in accordance with ANSI/AMCA 210/15 Standard, certified by BESS Lab